



POSITIVE ABOVE GROUND DC STRING

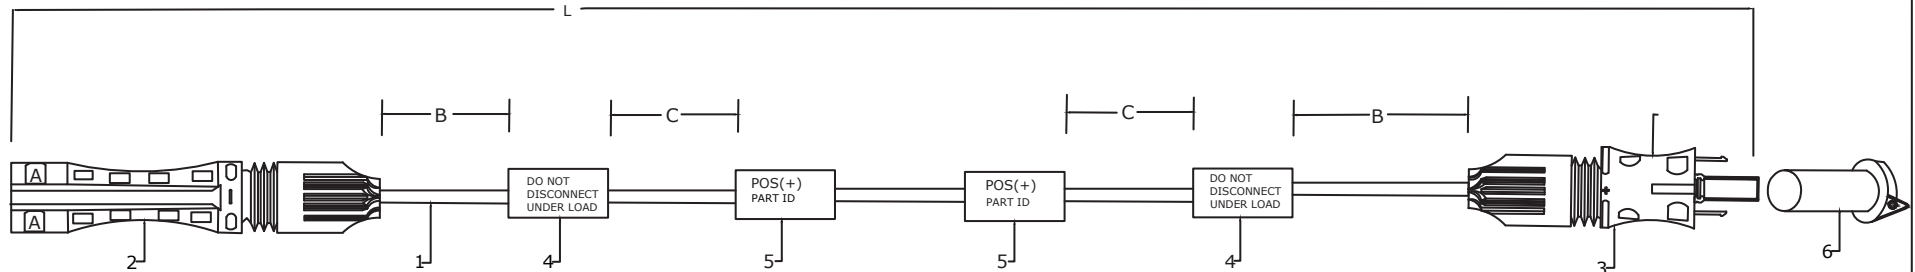

L= Assembly Length meters/pc
as mentioned below

NO	DESCRIPTION	SUPPLIER	PART NUMBER	QTY	REMARK
1	1.5kV DC 1C X 6 Sqmm, ATC / XLPO(Red)/XLPO(Black) as per EN-50618	KEI			
2	MC4 EV02 MALE CONNECTOR	MULTI CONTACT	PV-KST4-EVO2(320089P0001-UR)	1	
3	MC4 EV02 FEMALE CONNECTOR	MULTI CONTACT	PV-KST4-EVO2(320088P0001-UR)	1	
4	CABLE LABEL DO NOT DISCONNECT UNDER LOAD			2	PAPER STICKER LABEL
5	CABLE LABEL POS (+) Part ID			2	PAPER STICKER LABEL (Refer Cable Type & Length Table For Part ID.)
6	MC4 EV02 SEALING CAP (FEMALE)	MULTI CONTACT	32.0716	1	

CABLE TYPE & LENGTH TABLE				
CABLE TYPE	LENGTH (mm)			PART ID
	1.5kV DC 1C X 6 Sqmm, ATC / XLPO(Red)/XLPO(Black) as per EN-50618	L	B	
	18400	100	100	PS-AG-18.4
	36800	100	100	PS-AG-36.8
	55200	100	100	PS-AG-55.2
	73600	100	100	PS-AG-73.6
	92000	100	100	PS-AG-92.0
	110400	100	100	PS-AG-110.4
	128800	100	100	PS-AG-128.8